




# Product Bulletin

## **NEAPCO Greaseable CV Heads**

The NEAPCO 1350 Series Constant Velocity Assemblies can now be re-greased in the ball assembly. A low profile lube fitting is located on the underside of the ball stud yoke and accepts a needle style grease gun tip. Placing the lube fitting at this location maintains the integrity of the external boot seal design. Previously offered only in OEM shafts, NEAPCO's design is being offer exclusively to our Aftermarket customers at no additional charge.

This design will provide additional longevity when properly serviced. This will provide an additional level of serviceability for Heavy Duty and Off Road applications.

### **Another Innovative Drivetrain Solution from NEAPCO!**

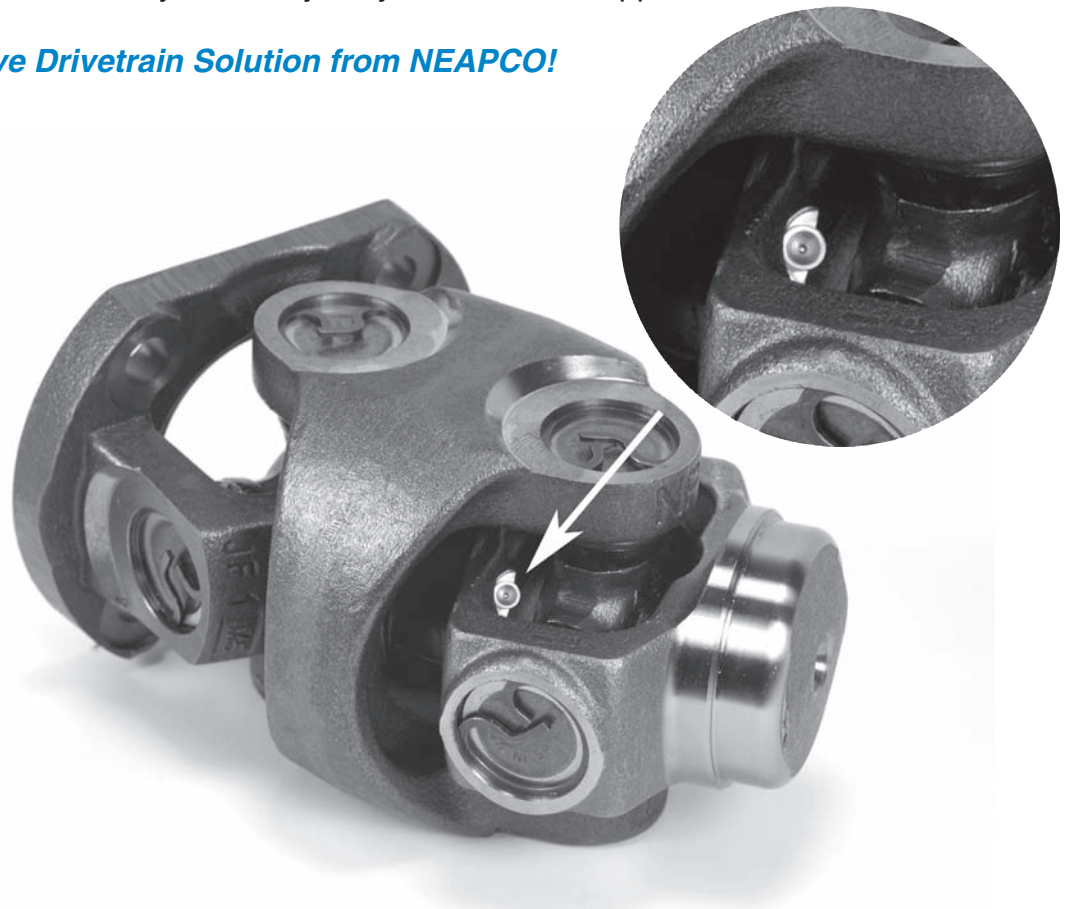

NEAPCO, LLC 740 Queen St. Pottstown, PA 19464

*Innovative Drivetrain Solutions*

Phone: 800-821-2374  
E-mail: [hd@neapco.com](mailto:hd@neapco.com)  
©2006 NEAPCO, LLC

( [Insert this sheet into  
Section IX in the  
DS245 Master Catalog](#) )  
9901273

Fax: 610-326-2002  
Web site: [www.neapco.com](http://www.neapco.com)  
0706 1